


DIGITUS® HDMI High Speed with Ethernet Connection Cable

AK-330107-100-S

EAN 4016032307051

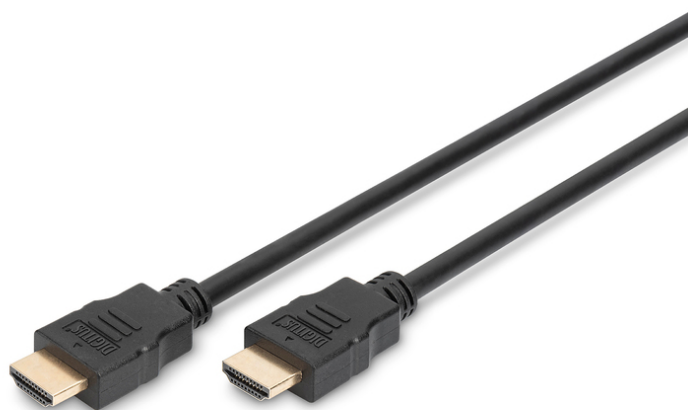

HDMI High Speed Connection Cable, Type A M/M, 10.0m, Full HD, 1080P@60Hz, gold, bl

This HD and 3D suitable cable used for connection of audio/video devices, such as Blu-ray player, game pads or consoles, etc., for example, with a TV, monitor or computer. Also capable for use of any IP-based application.


Full HD audio/video transmission (1080p)

- Support up to 1080p with 60Hz
- Support 3D
- Support Audio Return Channel (ARC)
- Support Consumer Electronic Control (CEC)
- Support Lip-Sync (audio/video synchronisation)
- Dolby TrueHD capable
- With Ethernet Channel (HEC)

Attributes

- Assortment: HDMI Cables
- AWG: 28
- Color cable: black
- Color connector: black
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A, plug
- Connector surface: gold-plated
- Ferrite filter: none
- HDMI Standard: High Speed HDMI with Ethernet
- HDTV Standard: Full HD
- Hoods: molded
- Packaging: Polybag
- Resolution max.: 1920 x 1200 Pixel, 60Hz
- Wire material: CU
- Length: 10 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	22	14.26	45.00	32.00	25.00	36,000.00
Packaging Unit Inside	1	0.65	5.00	23.00	27.00	3,105.00
Packaging Unit Single	1	0.65	32.00	23.00	2.00	1,472.00
Net single without Packaging	1	0.64	28.00	20.00	5.00	0.00

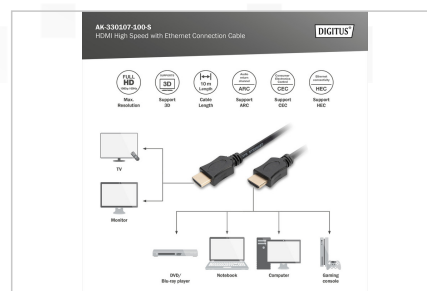

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com