

DIGITUS® USB 2.0 CAT Extender, 4-Port USB-A, 150 m

DA-73120

EAN 4016032502104



USB Extender, USB 2.0, 4x USB-A ports, 150m For use with CAT 6 (or higher) cable

This USB extender provides a reliable solution for transmitting USB signals over distances of up to 150 meters using a CAT 6 (or higher) network cable (not included) without signal loss. It is ideal for use in large offices, conference rooms, surveillance systems, or industrial environments where longer USB connections are required. The USB 2.0 standard enables transfer rates of up to 480 Mbps. This ensures seamless connectivity for a wide variety of USB devices, such as cameras, printers, scanners, keyboards, mice, and USB flash drives. The extender offers maximum flexibility thanks to its four USB-A ports, allowing multiple devices to be used simultaneously—ideal for work environments with various peripherals. The plug-and-play design allows for easy installation without the need for additional drivers. In addition, the robust metal housing ensures durability and stability, even in demanding industrial environments. Say goodbye to the limitations of conventional USB cables—with this 150m USB 2.0 extender, you can place your USB devices exactly where you need them without having to move your computer.

Overcome the technical limitations of USB cable lengths and reliably connect up to four USB devices over distances of up to 150 meters using a CAT 6 cable (or higher).

- Maximum range: 150 meters (via CAT 6 or higher)
- USB Ports: 4 USB 2.0 ports
- Transfer rate: Up to 480 Mbps (USB 2.0)
- Supports CAT 6 or higher network cables
- USB 2.0 signal booster reduces signal loss
- Protection: ESD protection (electrostatic discharge), surge and lightning protection, short-circuit protection
- With its own power supply, so no external power source is required
- Plug & Play: Easy installation, no software required

- Ideal for connecting devices located at a distance, such as cameras, printers, scanners, keyboards, etc.
- Transmitter (TX) Connections:
 - 1x USB-A port (USB 2.0) - Connection for signal source (laptop, etc.)
 - 1x RJ45 output (Gigabit Ethernet) - connection for CAT transmission cable
- Connections on the Receiver Unit (RX):
 - 4x USB-A ports (USB 2.0) — for connecting a mouse, keyboard, printer, etc.
 - 1x RJ45 input (Gigabit Ethernet) - connection for CAT transmission cable
 - 1x Power Supply Connector (DC 5V/1A) - Connects to an external power supply
 - 1x Reset Button
- Power supply:
 - TX: About the Source Device
 - RX: 5V DC/1A
- Power consumption:
 - TX: $\approx$ 2W
 - RX: $\approx$ 2W
- Operating temperature: -20°C to 60°C
- Power consumption: TX approx. 3.5 W, RX approx. 2.5 W
- Dimensions (per unit): L 7.6 x W 6.0 x H 2.1 cm
- Weight: TX 123 g, RX 128 g
- Case material: Metal
- Color: Black


Package contents

- 1 transmitter
- 1 receiver
- 1 user manual
- 1x USB-A 2.0 cable, 1.2 m
- 1x Power Supply (DC 5V/1A), 1.5 m

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	11.02	37.50	26.00	38.00	37,050.00
Packaging Unit Inside	1	0.55	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.55	15.00	11.70	7.70	1,351.35
Net single without Packaging	1	0.25	2.00	6.00	7.50	0.00

More images:

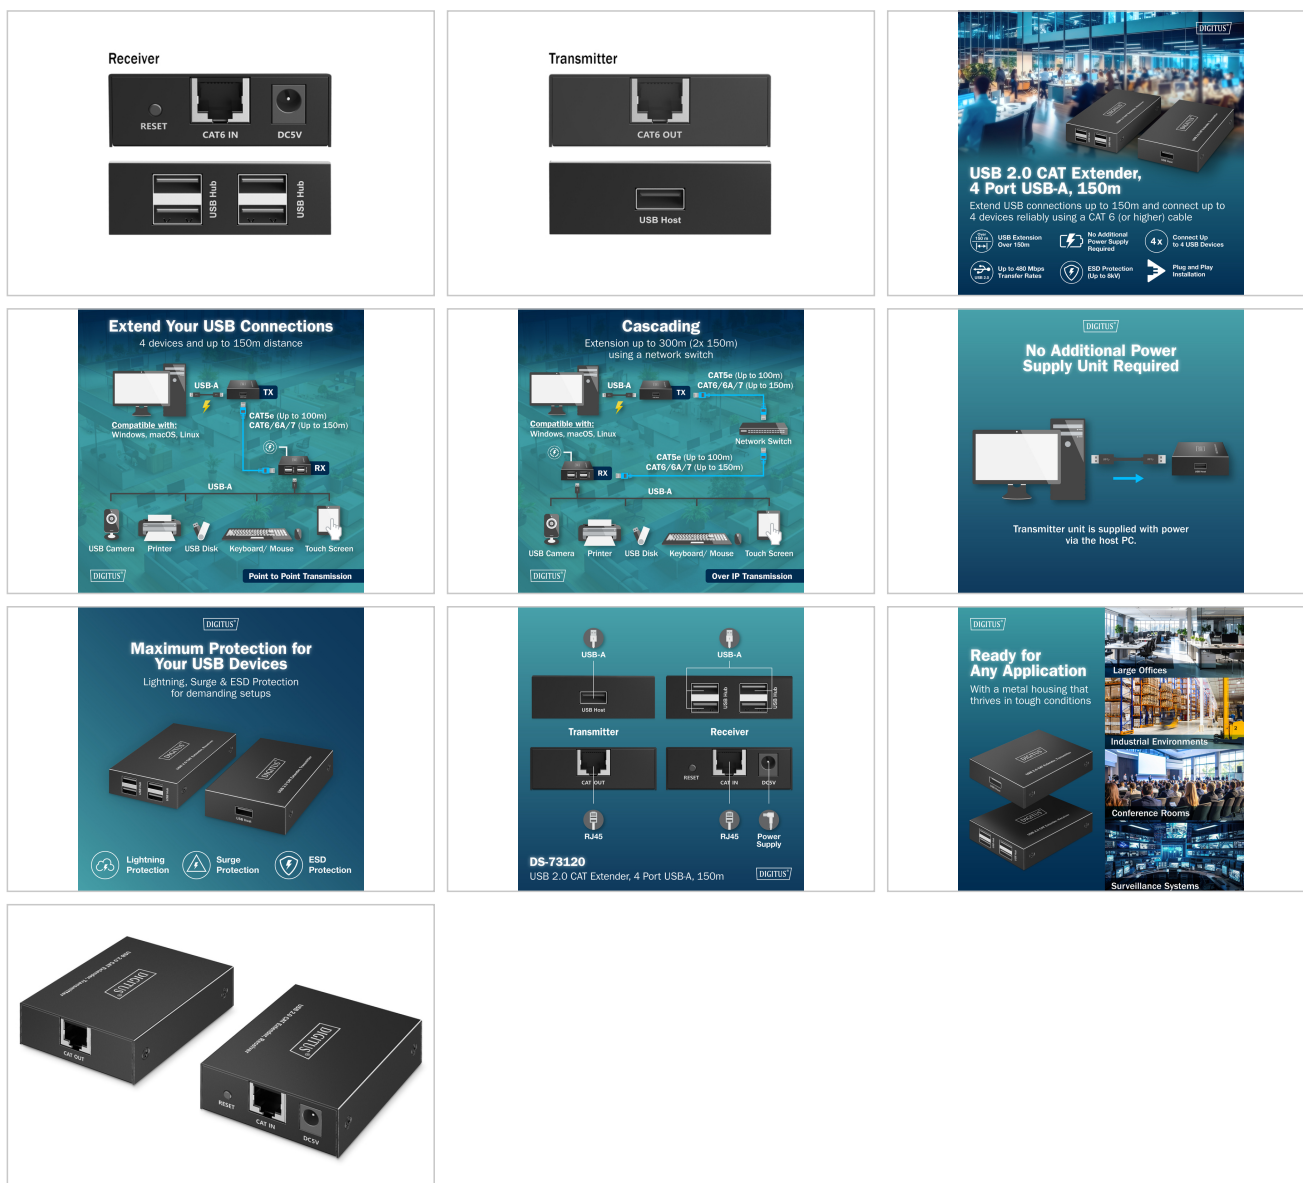

Safety notes

- Overloading can lead to overheating and damage to the appliance or the connected peripherals.
- If necessary, use an external power supply to ensure stable performance.

- If devices such as external hard disks or printers that require a high power consumption are connected, the device should be used with an external power supply. Otherwise, the device could be overloaded or functional problems could occur.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com