

DIGITUS® 100W USB GaN Charger, 2x USB-C, 1x USB-A

DA-10304

EAN 4016032505846



USB GaN Charger, 100W 2x USB-C, 1x USB-A, White

With our 100-watt GaN II charger, you can charge your devices faster, safer, and more efficiently than ever before. Advanced GaN II (gallium nitride) technology delivers maximum power for smartphones, tablets, and even high-performance laptops—all with just one compact USB charger. Two USB-C ports, each delivering up to 100 watts, and one USB-A port delivering up to 22.5 watts offer complete flexibility. Whether used individually or in parallel, the intelligent power distribution ensures optimal performance—for example, 70 W + 30 W via USB-C1 and USB-C2, or 70 W + 18 W via USB-C1 and USB-A. Even at full capacity, your devices are powered reliably and safely. Thanks to built-in safety features such as overcurrent, overvoltage, and temperature protection, you can enjoy worry-free charging. The housing is made from up to 30% recycled PCR (post-consumer recycling) material, and the packaging is 100% plastic-free—without compromising on quality or durability. Universally compatible with smartphones, tablets, laptops, and many other USB devices—the 100 W GaN II Charger is the smart solution for anyone who wants maximum performance and cutting-edge technology in a single device.

Power meets portability: This high-performance 100W USB charger combines powerful performance with a sleek design—ideal for fast charging of laptops, smartphones, and more, whether at home or on the go.

- Maximum power per port: USB-C1 max. 100W, USB-C2 max. 100W, USB-A max. 22.5W

- Multi-Device Charging (2 Ports) USB-C1 + USB-C2: 70 W max. + 30 W max.
- Multi-Device Charging (2 Ports) USB-C1 + USB-A: 70 W + 18 W max.
- Multi-Device Charging (2 Ports) USB-C2 + USB-A: 12 W + 12 W max.
- Multi-Device Charging (3 Ports) USB-C1 + USB-C2 + USB-A: 70W + 12W + 12W max.
- GaN II technology (gallium nitride) for high efficiency, low heat generation, and a compact design
- Plastic housing made from 30% recycled PCR material
- Plastic-Free Packaging
- Protection against overcurrent, short circuits, and overheating
- Input Voltage/Rated Current/Frequency: 100–240 V / 2.0 A / 50/60 Hz
- Average active efficiency: 85.77%
- Power consumption in standby mode: 0.29 W
- Product Color: White
- Dimensions: 4.6 x 9.27 x 4.0 cm
- Weight: 184 g

Attributes

- Style: Charger/Power supply
- Type: Notebook


Package contents

- USB charger
- User Manual

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	40	10.34	34.50	39.00	27.00	36,328.50
Packaging Unit Inside	20	5.17	25.00	37.00	16.50	15,262.50
Packaging Unit Single	1	0.26	9.30	1.65	4.60	70.59
Net single without Packaging	1	0.17	4.10	4.10	4.70	0.00

More images:

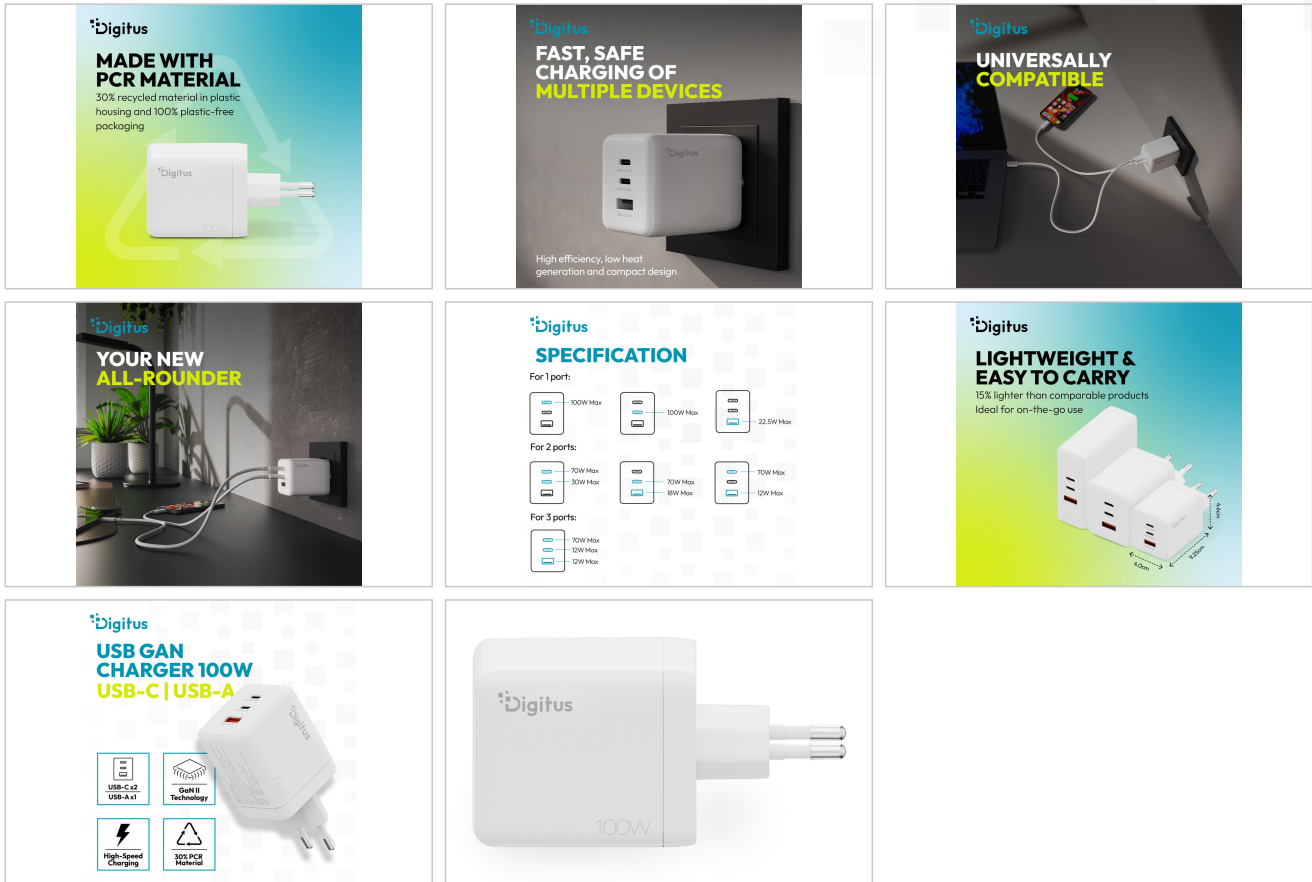

Safety notes

- Use charging adapters or power supply units in accordance with the instructions in the operating instructions to ensure optimum performance.
- Connect the charging adapter to an easily accessible socket in the voltage range between 100-240 V AC.
- Disconnect the charging adapter from the socket after use.
- Do not use the charging adapter with electronic devices that are outside the specifications of the charging adapter.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com