
# DIGITUS® Face plate for Multimedia / Keystone Modules

**DN-93831-1**

**EAN 4016032384137**

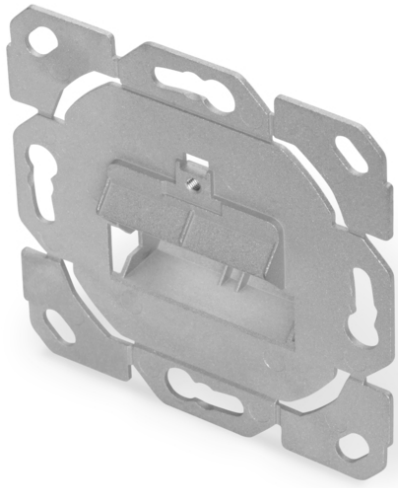

**Face Plate w/o central plate, w/o frame, design compatible**

The DIGITUS® face plate is suitable for the connection of the shielded DIGITUS® Keystone Modules. Included dust protection shutters provide perfect protection. The connection way of the module is 45° vertical. The face plate is fully designed and compatible with common switch programs.


**Design compatible to current switch ranges of switch manufacturers**


- For connection of Keystone Modules
- Connection way of the modules is 45° vertical
- Compatible with shielded DIGITUS® CAT 6A Keystone Modules e.g. DN-93615, DN-93617 & DN-93619
- Design compatible with common switch programmes
- Can be used as 1-Port and 2-Port wall outlet
- Suitable for installation in trunking, flush and surface mount
- Wall outlet material: Die-cast metal
- Operation temperature: -20° C to +70 °C (ISO/IEC 11801, EN 50173-1, ANSI/TIA/EIA 568 C)


**Logistics**


| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|---|---|---|---|---|---|---|
| **Packaging Unit Carton** | 120 | 7.52 | 47.50 | 27.50 | 20.00 | 26,125.00 |
| **Packaging Unit Inside** | 12 | 0.75 | 26.50 | 9.00 | 9.00 | 2,146.50 |
| **Packaging Unit Single** | 1 | 0.06 | 8.50 | 3.00 | 8.50 | 216.75 |
| **Net single without Packaging** | 1 | 0.07 | 2.40 | 7.00 | 7.00 | 0.00 |


**More images:**

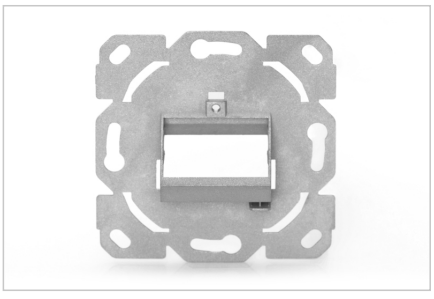


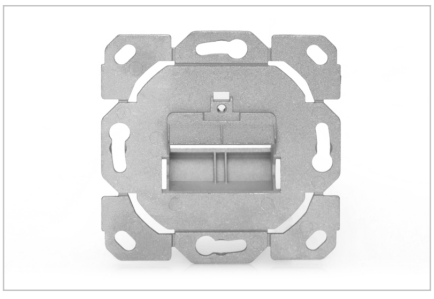

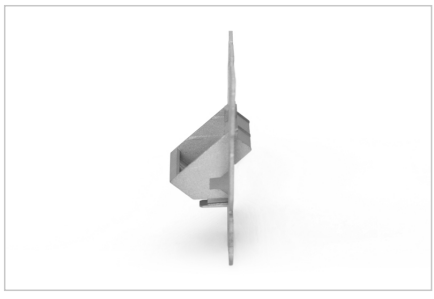

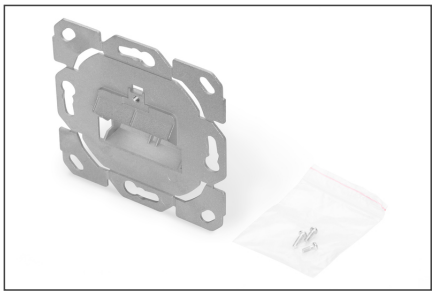

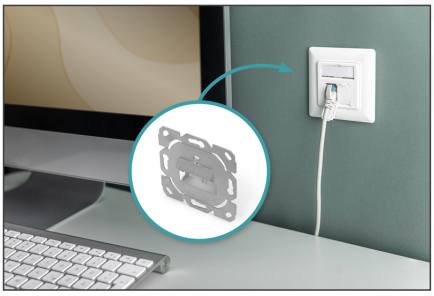

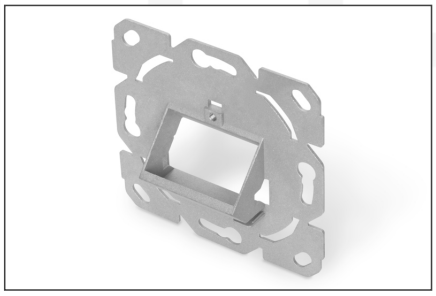

**Safety notes**

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com