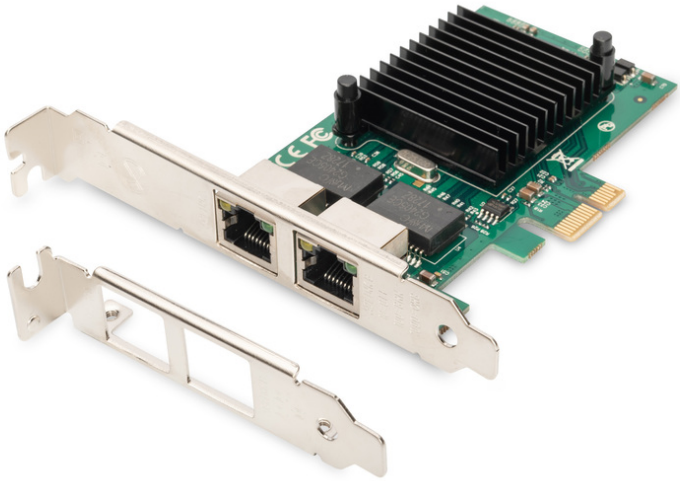
# DIGITUS® Gigabit Ethernet PCI Express Card, 2-port

**DN-10132**

**EAN 4016032463139**



**Gigabit Ethernet PCI Express Card, 2-port 32-bit, low profile bracket, Intel chipset**

The DIGITUS® PCI Express Dual Port Gigabit Network Card with integrated Intel chipset offers the option to make two Gigabit ports for a server or a workstation available via a single PCI slot. Each port is fully compatible in accordance with IEEE802.3/u/ab standards and offers a full Gigabit connection. In addition to supporting IPv4 and IPv6 protocols, the card also supports jumbo frames as well as layer 2 . Its versatile configuration options make the card perfect for using with virtual machines or to set up a router/firewall. The low-profile slot bracket included in delivery also offers the option of integrating the card into compact computer cases in which standard slot brackets cannot be used.

**Expand your PC with PCIe slot by 2 Gigabit Ethernet ports with 1000 Mbit/s each**

- Data transmission speed: 1 Gbps per port
- Connections: 2 x RJ45
- Chipset: Intel 82575EB (JL82575EB)
- PCIe slot: PCI Express X 1
- PCI Express channels: 1
- Additional low-profile slot, so that the card can be used in computers with little space
- Supports PCI bus power management interfaces rev 1.1 specifications
- Complies with IEEE802.3ab, IEEE802.3u and IEEE802.3 specifications
- Half-Duplex @ 10/100 Mbps, Full-Duplex @ 10/100/1000 Mbps
- Supports auto MDI/MDIX crossover at all speeds
- Supports RSS (Receive Side Scaling)
- Supports IPv4, IPv6 protocols
- Supports jumbo frames up to 9.5K
- Supports UDP/TCP and IP checksum offloading
- Supports Virtual Machine Device Queues (VMDq)
- Supports VMDq - next generation (8VMs)
- Supports statistics for management and remote monitoring
- Driver support for MVMware ESXi 6.5 /6.5U1 / 6.5U2 / 6.5U3 / 6.7/ 6.7U1/ 6.7U2/ 6.7U3
- Operating temperature: 0 °C ~ 55 °C
- Operating humidity: 10 - 90% (non condensing)
- Storage temperature: -60 °C ~ 140 °C
- Storage humidity: 10 - 80% (non condensing)

**Package contents**

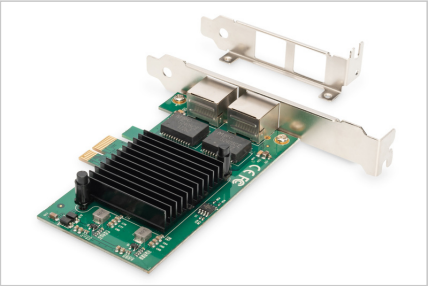
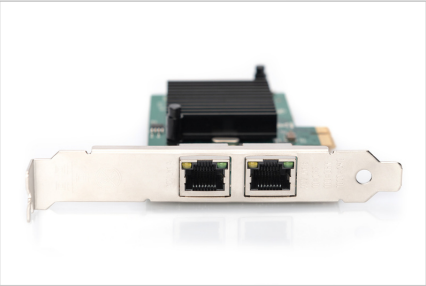
- Gigabit Ethernet PCI Express card, 2-port
- Low-profile slot bracket
- Drivers on CD
- QIG

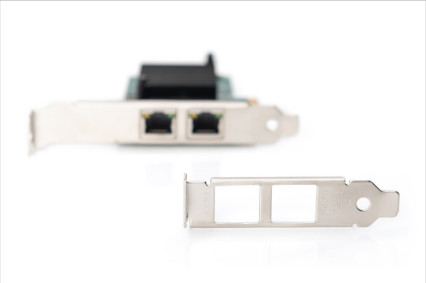
**Logistics**

| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|---|---|---|---|---|---|---|
| **Packaging Unit Carton** | 40 | 6.60 | 38.00 | 28.00 | 30.00 | 31,920.00 |
| **Packaging Unit Inside** | 1 | 0.17 | 0.00 | 0.00 | 0.00 | 0.00 |
| **Packaging Unit Single** | 1 | 0.17 | 22.00 | 3.00 | 15.50 | 1,023.00 |
| **Net single without Packaging** | 1 | 0.07 | 10.50 | 2.00 | 12.00 | 0.00 |


Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

**More images:**

**Safety notes**

- Switch off the computer completely and disconnect it from the power supply before installing or removing the network card.
- Static discharge can damage the product or the PC. Take measures against static discharge (ESD) when installing the product, e.g. wear an antistatic wrist strap.
- Before installation, touch the metal surface of the PC housing or another grounded object to ground any ESD charge via the housing.
- Avoid using too much force when connecting the product to the PC.
- Please ensure that any cables are connected correctly without overstretching or damaging them.
- Avoid touching the contacts of the product with your fingers to prevent corrosion or static charge.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com