# DIGITUS® USB silicone cable, USB4 Gen3, 40Gbps, 1m, black

**AK-300344-010-S**

**EAN 4016032496106**



**USB Silicone connection cable, USB-C - USB-C 1m, USB4 Gen3, 40G, 240W, 8K, black**

Reliable and easy connection to your USB-C devices with your PC thanks to the soft and flexible silicone cable. Data transfer rates of 40 Gbits/s for synchronization and data transfer, an 8K screen resolution and a power delivery specification of 240W for charging are possible with this high-quality all-rounder cable.

**Fast charging and synchronization with the high-quality and soft silicone connection cable. 8K video transmission is possible with the USB version USB4 Gen3**

- Supports data transfer rates of 40 Gbps
- Backwards compatible with USB 3.2/USB 3.1, USB 3.0, USB 2.0 and USB 1.1
- Supports the USB power delivery function with 48V, 5A and 240W
- Supports 8K (7680x4320) @60Hz and 4K (3840x2160) @120Hz
- Durable cable with a service life of up to 10,000 bends (based on internal tests)
- Type C plug can be used on both sides

**Attributes**


- AWG: 30
- Color cable: black
- Connector 1: USB C, plug
- Connector 2: USB C, plug
- Connector surface: nickel-plated
- Ferrite filter: none
- USB compliance: USB 4.0
- Length: 1 m
- Shielding: triple shielding

**Logistics**

| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|---|---|---|---|---|---|---|
| **Packaging Unit Carton** | 150 | 6.26 | 21.00 | 32.00 | 50.00 | 33,600.00 |
| **Packaging Unit Inside** | 10 | 0.42 | 5.20 | 35.00 | 35.00 | 6,370.00 |
| **Packaging Unit Single** | 1 | 0.04 | 1.40 | 21.00 | 11.50 | 336.89 |
| **Net single without Packaging** | 1 | 0.03 | 1.30 | 12.00 | 10.00 | 0.00 |


Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

**More images:**

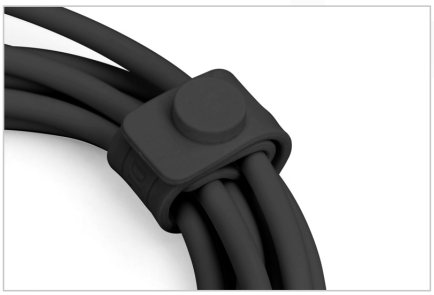












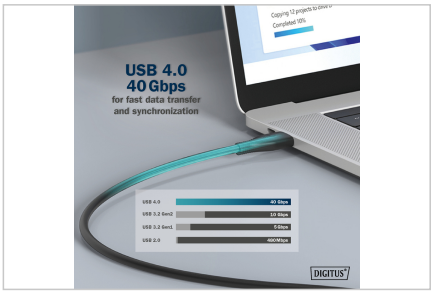

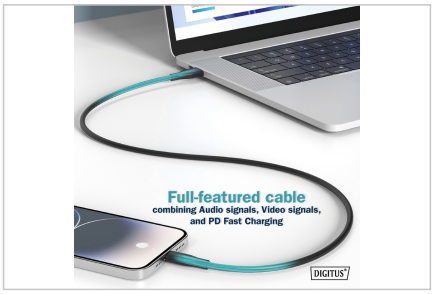

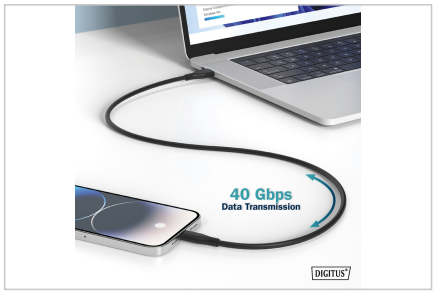


**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short

circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com