# DIGITUS® USB silicone cable, USB 3.2 Gen1, USB 5Gbps, 2m, black

**AK-300342-020-S**

**EAN 4016032496083**



**USB Silicone connection cable, USB-C - USB-C 2m, USB 3.2 Gen1, 5G, 4K, 100W, black**

Reliable and easy connection to your USB-C devices with your PC thanks to the soft and flexible silicone cable. Data transfer rates of 5 Gbits/s for synchronization and data transfer, a 4K screen resolution and a power delivery specification of 100W for charging are possible with this high-quality cable.

**Fast charging and synchronization with the high-quality and soft silicone connection cable. 4K video transmission is possible with the USB version USB 3.2 Gen1.**

- Supports data transfer rates of 5 Gbps
- Backwards compatible with USB 3.1, USB 3.0, USB 2.0 and USB 1.1
- Supports the USB power delivery function with 20V, 5A and 100W
- Supports 4K (3840x2160) @60Hz
- Durable cable with a service life of up to 10,000 bends (based on internal tests)
- Type C plug can be used on both sides

**Attributes**

- AWG: 31
- Color cable: black
- Connector 1: USB C, plug
- Connector 2: USB C, plug
- Connector surface: nickel-plated
- Ferrite filter: none
- USB compliance: USB 3.0 / 3.1
- Length: 2 m
- Shielding: triple shielding


**Logistics**


| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|---|---|---|---|---|---|---|
| **Packaging Unit Carton** | 70 | 5.23 | 21.00 | 32.00 | 50.00 | 33,600.00 |
| **Packaging Unit Inside** | 10 | 0.75 | 7.20 | 50.00 | 50.00 | 18,000.00 |
| **Packaging Unit Single** | 1 | 0.07 | 1.90 | 25.00 | 14.00 | 663.25 |
| **Net single without Packaging** | 1 | 0.06 | 1.80 | 13.00 | 14.00 | 0.00 |


Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

**More images:**



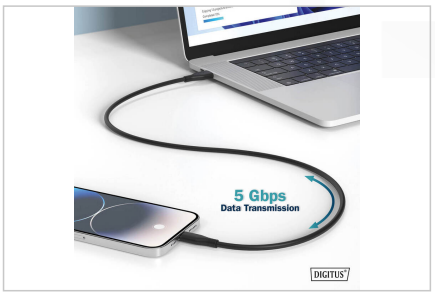

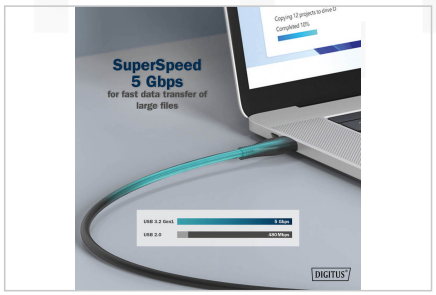
















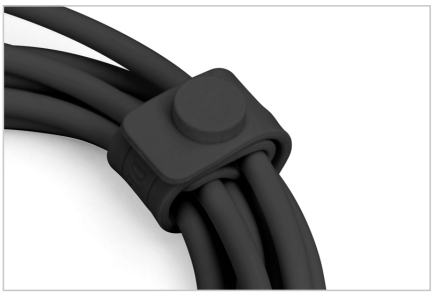





**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com