# DIGITUS® Modular HD LCD KVM console with 19" TFT, 16-port HDMI KVM connection, touchpad, German keyboard layout

**DS-72221-7GE**

**EAN 4016032491736**

**Modularized 43,2cm (19") HD TFT console with 16-port HDMI,with GE keyboard,RAL 9005 black**

Thanks to its modular design, the DIGITUS® 19" HD TFT console offers a variety of individual configuration options so that it can be adapted to the area of application of the console. This makes the console cost-saving and it can be upgraded or retrofitted with additional modules at any time. The flexible configuration guarantees that the console is highly future-proof. The modular console consists of a 19" monitor, a 16-port HDMI KVM switch and the touchpad.

**The console can be completely pulled out of the server cabinet and the TFT screen can be tilted by 120 degrees**

- Resolution: 1920x1080 at 60Hz
- Console creates up to 85 % more space
- Contrast ratio: 1000:1
- Supports: 16.7 M colors
- 16-port HDMI KVM switch included
- Mouse touch board with two function buttons
- The console can be completely pulled out of the server cabinet and the TFT screen can be tilted by 120 degrees
- Console safety lock to prevent damage
- Interface: HDMI
- Number of ports: 16
- Screen size: 19 inch
- Power consumption specification: Input: 100 - 240V AC,⊠Output: DC 12V / 4A
- Device Power consumption (max.): 30W
- DC plug size: 5.5 x 2.1 mm
- DC plug electrode: Inside ( + ) , Outside ( - )
- Cable length: 1.8 m

**Attributes**

- Cascading possible: yes
- Interface: HDMI
- Keyboard Layout: DE
- Number of ports: 16
- Screen size: 19 inch

**Package contents**

- Modular 19" console
- 16-port HDMI KVM switch
- Keyboard with German keyboard layout
- User manual
- Power supply unit
- Mounting material
- 16 HDMI + USB connection cable

**Logistics**

| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|---|---|---|---|---|---|---|
| **Packaging Unit Carton** | 1 | 18.30 | 75.50 | 63.00 | 20.50 | 97,508.20 |
| **Packaging Unit Inside** | 1 | 18.30 | 0.00 | 0.00 | 0.00 | 0.00 |
| **Packaging Unit Single** | 1 | 18.30 | 71.00 | 59.00 | 15.00 | 62,835.00 |
| **Net single without Packaging** | 1 | 15.20 | 44.50 | 55.60 | 4.50 | 0.00 |


Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

**More images:**

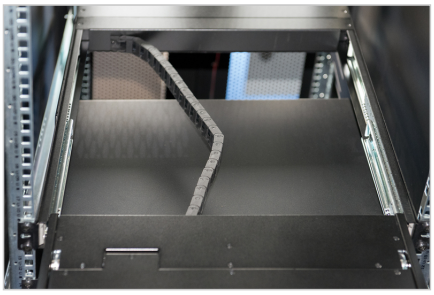

**Safety notes**

- This product is intended for indoor use only.
- Read all instructions.
- Follow all warnings and instructions on the device.
- Do not place this appliance on an unstable surface (such as a trolley, stand, table, etc.).
- If this appliance falls, it can cause serious damage.
- Do not use this appliance near water.
- Do not place this appliance near or above a radiator.
- The housing is equipped with openings for heat dissipation and ventilation. To prevent overheating during operation, the ventilation openings must not be blocked or covered.
- Do not place the appliance on a soft surface (e.g. bed, sofa, blanket, etc.). This will block the ventilation.
- The appliance must not be installed in a closed environment if adequate ventilation is not guaranteed.
- Do not spray any liquids onto the appliance.
- Disconnect the mains plug before cleaning. Do not use any liquid or foam cleaners.
- Clean the appliance with a damp cloth.
- Connect the device according to the power supply on the rating plate.
- This device is designed for the IT distribution system with 100 V - 230 V voltage.
- To prevent damage to the appliance, it is important that all appliances are properly earthed.
- Do not place any objects on the power cable and lay it in such a way as to avoid tripping hazards.
- If an extension cable is used for the appliance, make sure that the total capacity of all products using the cable does not exceed the current load.
- Ensure that the total current of all products connected to the socket does not exceed 15 A.
- Use a surge protector, a regulator or an uninterruptible power supply (UPS) to protect your system from sudden, temporary and reduced power.
- Secure the system cable and mains cable properly and ensure that no objects are pressing on the cable.
- Do not insert any objects into the appliance through the openings in the housing. There is a risk of a short circuit, which can lead to fire or electric shock.
- Do not attempt to repair the appliance yourself. Always contact an authorized customer service centre.
- If any of the following conditions occur, unplug the appliance and send it to an authorized service centre for repair
- The mains cable or plug is damaged or worn;
- Liquid has penetrated the appliance;
- The device has been exposed to rain or water;
- The device has been dropped or the housing has been damaged;
- The function of the device has obviously changed;
- The appliance cannot be operated as described in the operating instructions.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com


Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.